

EPSA 80 / 120 / 240 / 340 / 400



ELECTRONIC POWER SUPPLY

System solution for Hœnle UV discharge lamps

FEATURES

- Up to 40 kW maximum power
- Continuously variable power control
- Service- and installation-friendly due to pluggable connections
- Small space required/ reduced footprint

BENEFITS

- High efficiency
- Reduction of production costs
- Improved reignition
- Longer lamp life
- Good cost/performance ratio

EPSA – ELECTRONIC POWER SUPPLY

The EPSA is an electronic power supply for UV discharge lamps with a maximum power from 9.2 up to 40 kW.


FEATURES

The square-wave power output of the EPSA effects a greater UV yield at the same electrical power compared to the sinusoidal power output of a conventional transformer/ choke ballast.

ADDITIONAL FEATURES

- Continuously variable power control, application dependent between 11% and 100%
- Integrated ignitor
- Improved lamp reignition compared to conventional technology
- Compact and lightweight design
- Less weight compared to a conventional power supply
- Service-friendly due to pluggable connections

	EPSA 80	EPSA 120	EPSA 240	EPSA 340	EPSA 400
Maximum power output as per specification	9,2 kW	12 kW	24 kW	32 kW	40 kW
Lamp voltage	max. 450 V	max. 900 V	max. 1.900 V	max. 2.500 V	max. 2.500 V
Mains supply	3x 400 – 480 V (±10%), 50/60 Hz	3x 400 – 480 V (±10%), 50/60 Hz	3x 400 – 480 V (±10%), 50/60 Hz	3x 400 – 480 V (±10%), 50/60 Hz	3x 400 – 480 V (±10%), 50/60 Hz
Power control	11 – 100 % bei analog signal 1,1 – 10 V DC application dependent	11 – 100 % bei analog signal 1,1 – 10 V DC application dependent	11 – 100 % bei analog signal 1,1 – 10 V DC application dependent	11 – 100 % bei analog signal 1,1 – 10 V DC application dependent	11 – 100 % bei analog signal 1,1 – 10 V DC application dependent
Control	analog / digital fieldbus	analog / digital fieldbus	analog / digital fieldbus	analog / digital fieldbus	analog / digital fieldbus
Efficiency η	typ. 97 %	typ. 96 %	typ. 96 %	typ. 96 %	typ. 96 %
Power factor $\cos \varphi$	> 0,9	> 0,9	> 0,9	> 0,9	> 0,9
Dimensions (l x w x h)	460 x 177 x 80 mm	460 x 325 x 85 mm	460 x 305 x 165 mm	460 x 319 x 240 mm	598 x 346 x 269 mm
Bus interfaces (optional)	CANopen, Modbus	CANopen, Modbus	CANopen, Modbus	CANopen, Modbus	CANopen, Modbus

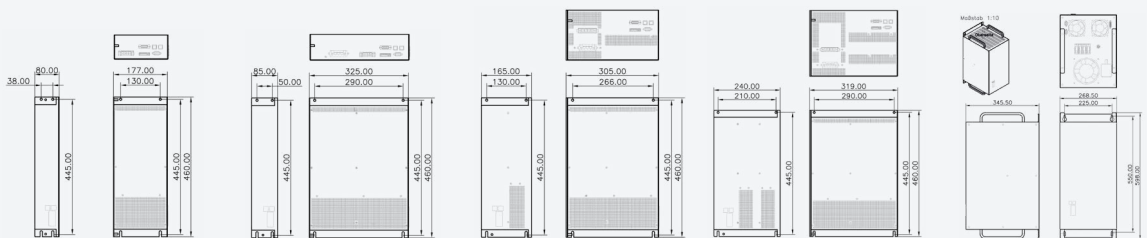

* valid for EPSA 80, 120, 240 and 340

Hoenle AG
Nicolaus-Otto-Str. 2
82205 Gilching
Germany

Phone: +49 8105 2083-0
curing@hoenle.com

www.hoenle.com



DIN EN ISO 9001
DIN EN ISO 14001

Operating parameters depend on production characteristics and may differ from the foregoing information. We reserve the right to modify technical data. © Copyright Hoenle AG. Updated 09/25